




## Flexible connector HCV

### Description

Flexible connector for production of flexible connectors. Made of galvanised steel tape, permanently combined with anti-vibration plastic material. Helps prevent vibration and noise transmission in ventilation systems. Temperatures range from -30°C to 80°C.

### Technical drawing

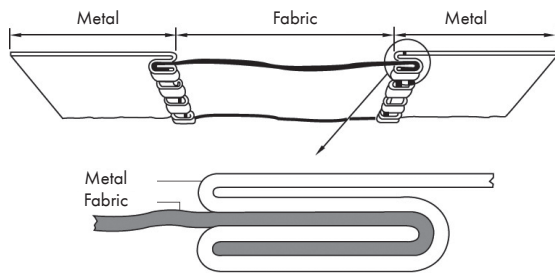

### Dimensions [mm]

Model	Metal	Material	Metal
HCV 30/60/30	30	60	30
HCV 35/60/35	35	60	35
HCV 45/75/45	45	75	45

### Technical specifications

Basic fabric	Polyester YARN
Coating	PVC
Color	Grey
Range of application temperature	-30/+80°C
Length	25 mb




## Rubber mat MKV PRO

### Description

Self-adhesive rubber mats "MKV" are made of rubber foam, mesh enforced. Intended for thermal insulation of plenum boxes, distributors, and for ventilation and conditioning systems. Roll width 1 m.

### Technical drawing

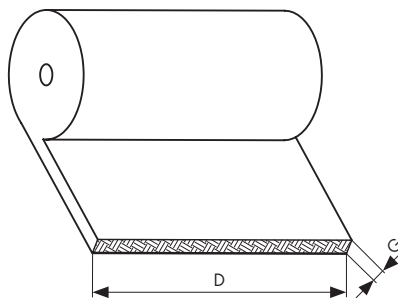

### Dimensions [mm]

Model	D	G	Roll [m <sup>2</sup> ]
MKV PRO 6/30	1000	6	30
MKV PRO 10/20	1000	10	20
MKV PRO 19/10	1000	19	10

### Technical specifications

Thermal conductivity [W/(m <sup>2</sup> K)]	$\lambda$ 0°C ≤ 0,037; $\lambda$ 40°C ≤ 0,040
Temperature range	-40°C ÷ +85°C
Water vapor permeability	7000μ
Regulation	CE EN 14304:2009+A1:2013
Thickness	6 mm, 10 mm, 19 mm
Water vapor permeability	WS01